

# AIRBUS

Airbus Amber

## Memorandum

From

Airport Operations, Airbus

E airport.compatibility@airbus.com

Ref: XME2126619

Current date 15 December 2021


## Airbus Aircraft Data for Visual Aids Calibration

This document aims at providing aircraft data used for airport visual aids calibration (mainly PAPI - Precision Approach Path Indicator).

It shall be noted that the values at threshold can slightly differ from the values provided in the below tables, due to the effect of the flare maneuver initiation. The present values cannot be used for determining the approach minima category.

*For any question, please contact the Airbus Airport Operations department*

[airport.compatibility@airbus.com](mailto:airport.compatibility@airbus.com)

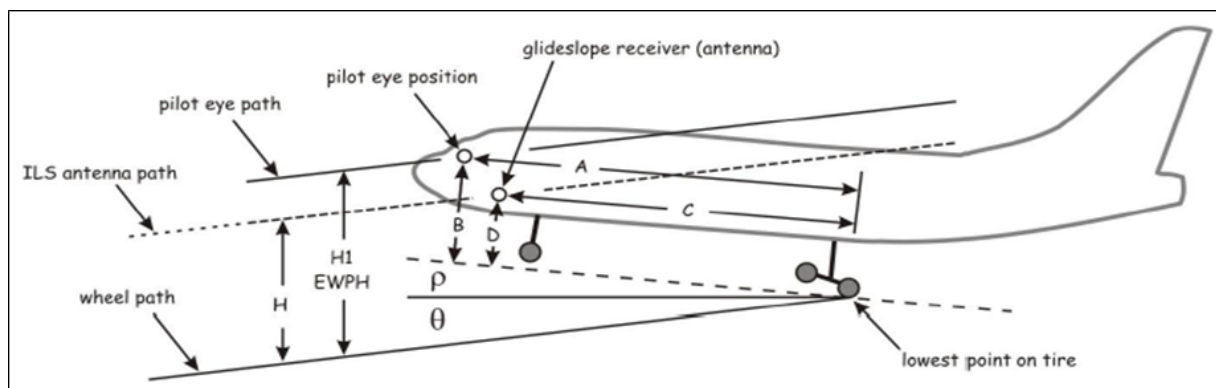

# AIRBUS

## Airbus Amber

H is the ILS-beam-to-wheel-path height; EWPH or H1 is the eye-path-to-wheel-path height.  
H4 is the Pilot's eye above wheels height.

The values H, H1 and H4 are calculated from the following formulas:

$$H = D.\text{cosp} + C.\text{sinp} + [ C.\text{cosp} - D.\text{sinp} ] . \tan\theta$$

$$H1 = B.\text{cosp} + A.\text{sinp} + [ A.\text{cosp} - B.\text{sinp} ] . \tan\theta$$

$$H4 = B.\text{cosp} + A.\text{sinp}$$

Normal landing configuration is considered for the calculations: Standard glidepath angle  $\theta$  of 3 degrees, Maximum landing weight,  $V_{REF} + 5\text{kts}$ , Configuration Full, CG 30%.

Aircraft	H		H1		H4	
	(m)	(ft)	(m)	(ft)	(m)	(ft)
A220-100	4.73	15.5	6.25	20.5	5.54	18.2
A220-300	4.85	15.9	6.39	21.0	5.56	18.2
A318-100	4.67	15.3	6.52	21.4	5.86	19.2
A319-100	4.78	15.7	6.63	21.8	5.93	19.5
A320-200	5.00	16.4	6.84	22.5	6.06	19.9
A320neo	5.33	17.5	7.14	23.4	6.36	20.9
A321-200	4.99	16.4	6.88	22.6	5.87	19.2
A321neo	5.25	17.2	7.12	23.4	6.11	20.1
A300B4-200	6.39	21.0	9.18	30.1	8.00	26.3
A300-600R	6.51	21.3	9.29	30.5	8.12	26.6
A310-300	6.77	22.2	9.54	31.3	8.57	28.1
A330-200	7.73	25.3	10.50	34.5	9.09	29.8
A330-300	8.05	26.4	10.82	35.5	9.24	30.3
A330-800	7.68	25.2	10.46	34.3	29.4	29.7
A330-900	7.99	26.2	10.77	35.3	9.19	30.2
A340-200	7.95	26.1	10.73	35.2	9.26	30.4
A340-300	8.15	26.7	10.92	35.8	9.35	30.7
A340-500	6.29	20.6	10.93	35.9	9.24	30.3
A340-600	7.00	23.0	11.66	38.2	9.69	31.8
A350-900	7.75	25.4	11.59	38.0	10.08	33.1
A350-1000	7.52	24.7	11.41	37.4	9.71	31.9
A380-800	5.95	19.5	11.19	36.7	9.52	31.2

It shall be noted that the values at threshold can slightly differ from the values provided in the below tables, due to the effect of the flare maneuver initiation. The present values cannot be used for determining the approach minima category.